

FIREPRO

FIRE PROTECTIVE BUILDING PRODUCTS

HEAD OFFICE: AUCKLAND (09) 579 0367
 WELLINGTON (04) 568 7086 • CHRISTCHURCH (03) 379 9364
www.firepro.co.nz sales@firepro.co.nz

CI/SfB

| | | | |
|--|--|--|--|
| | | | |
|--|--|--|--|

B400 DUCTING DATASHEET - AUG08


Product specifications can change. Contact us to ensure you have our latest datasheet

FIREPRO B400 SPIRALITE

Insulated Fire Protection for Ducting

FIREPRO SPIRALITE provides a fully insulated duct.

- Lightweight board, adding minimal weight to ducting and hangers.
- Easy to cut and fix on site.

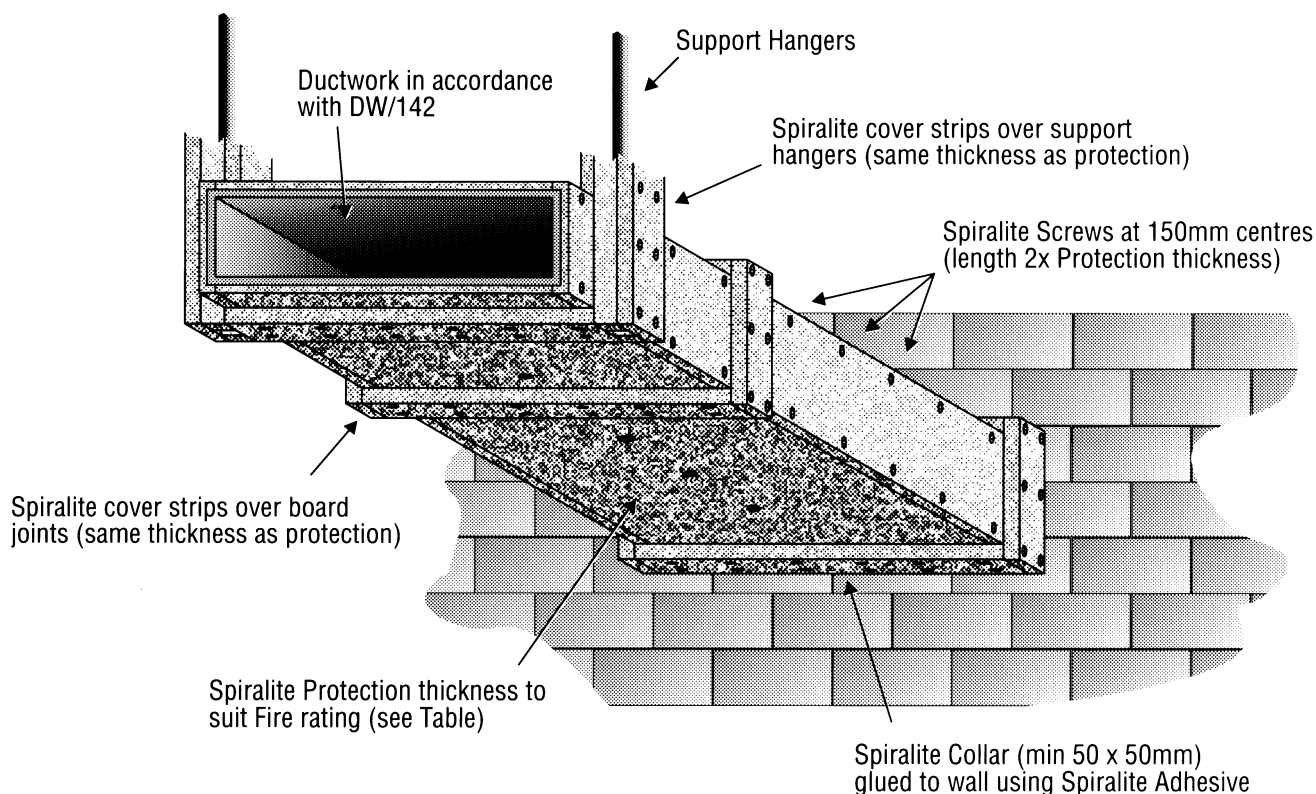

NOTE: 3mm stud welded pins to be fixed on soffit of ducting, 300mm from each edge and at 600mm centres. 38mm diameter non-return washers to be used to secure cladding on pins. Pins to be bent through 90°.

FIRE TESTING

Fire Tested and Assessed to BS476 Part 24 1987 by The Loss Prevention Council (LPC) UK.
 Assessment Reports
 CC84917/RHE,
 CC84917A/RHE,
 CC85666/RHE.

| Board Thicknesses Required. | | |
|-----------------------------|--------------|-------------|
| Fire Rating (min) | Fire on the: | |
| | Outside (mm) | Inside (mm) |
| 30 | 25 | 40 |
| 60 | 30 | 65 |
| 90 | 35 | |

NOTE: The technical information and suggestions for use and application presented herein represent the best information available to us and are believed to be reliable. They should not however be construed as controlling suggestions and there is no warranty of performance of our materials either expressed or implied. We urge that users of our materials conduct confirmatory tests to determine final suitability for their specific end uses. All dimensions are nominal. We reserve the right to make changes or to withdraw designs and products without notice.